

الحمادي للإلكترونيات
ALHAMMADI FOR ELECTRONICS

It is the amount of VCC and OUT, and if the amount of GDN is the opposite of OUT

Modules can be damaged by too high input supply voltage, reversed polarity, or improper use

Orientation of the installation The origin is facing up

This laser sensor does not contain a laser emitter


This price is for 1 laser sensor module

Parameter baby size: 1.52CM*2.22CM; Power supply voltage: 5V; Output: High when there

is laser irradiation: Low when there is no laser irradiation;

This sensor uses a non-modulated laser receiving head, please use it indoors in a place without light, sunlight or other lamps will interfere, it is recommended to use it in a dark environment.

Test Wiring Diagram:

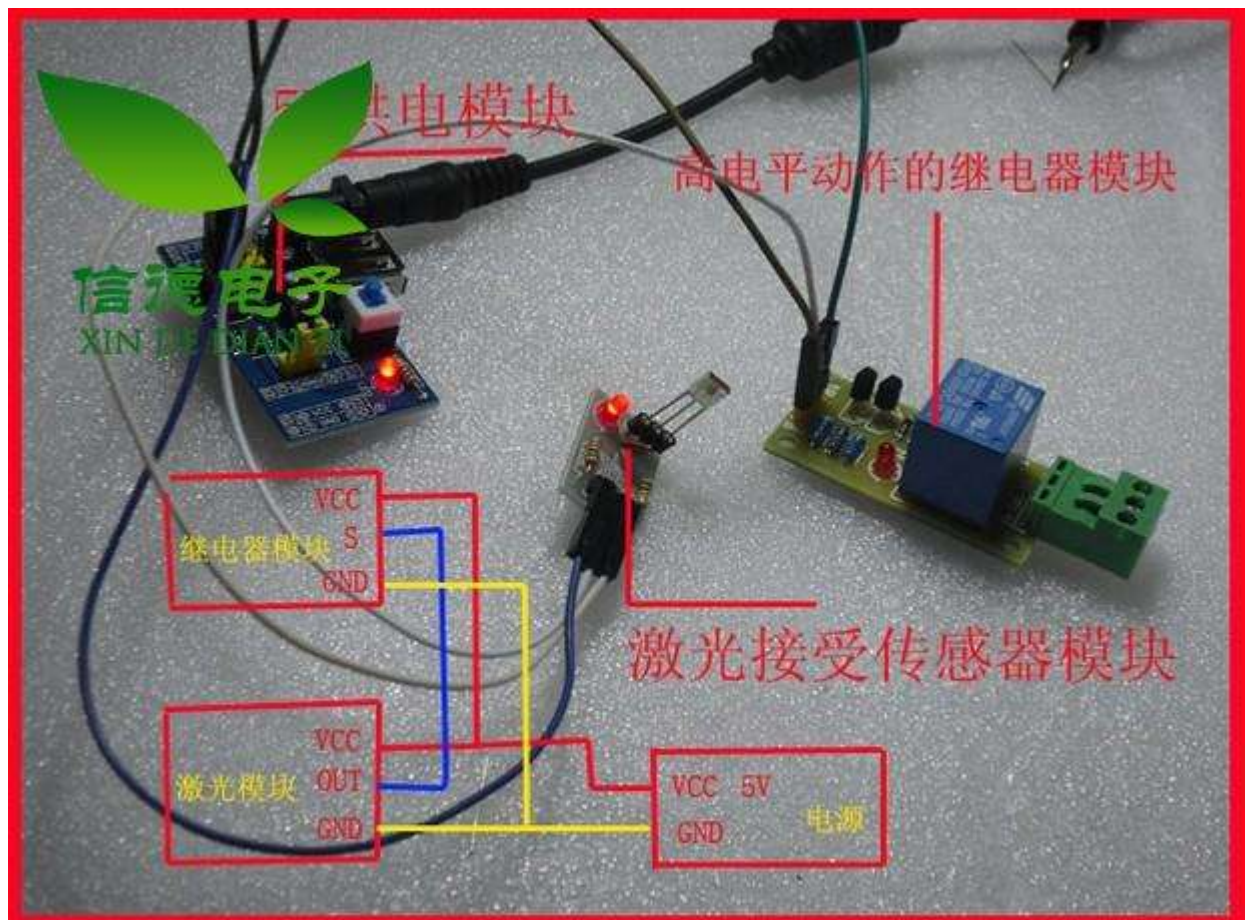


When there is no laser irradiation, the relay module that operates at a high level does not operate. When the laser is illuminated from the front, the relay module that operates at a high level:



When the laser is irradiated from the back side, the relay module that operates at a high

level also behaves:

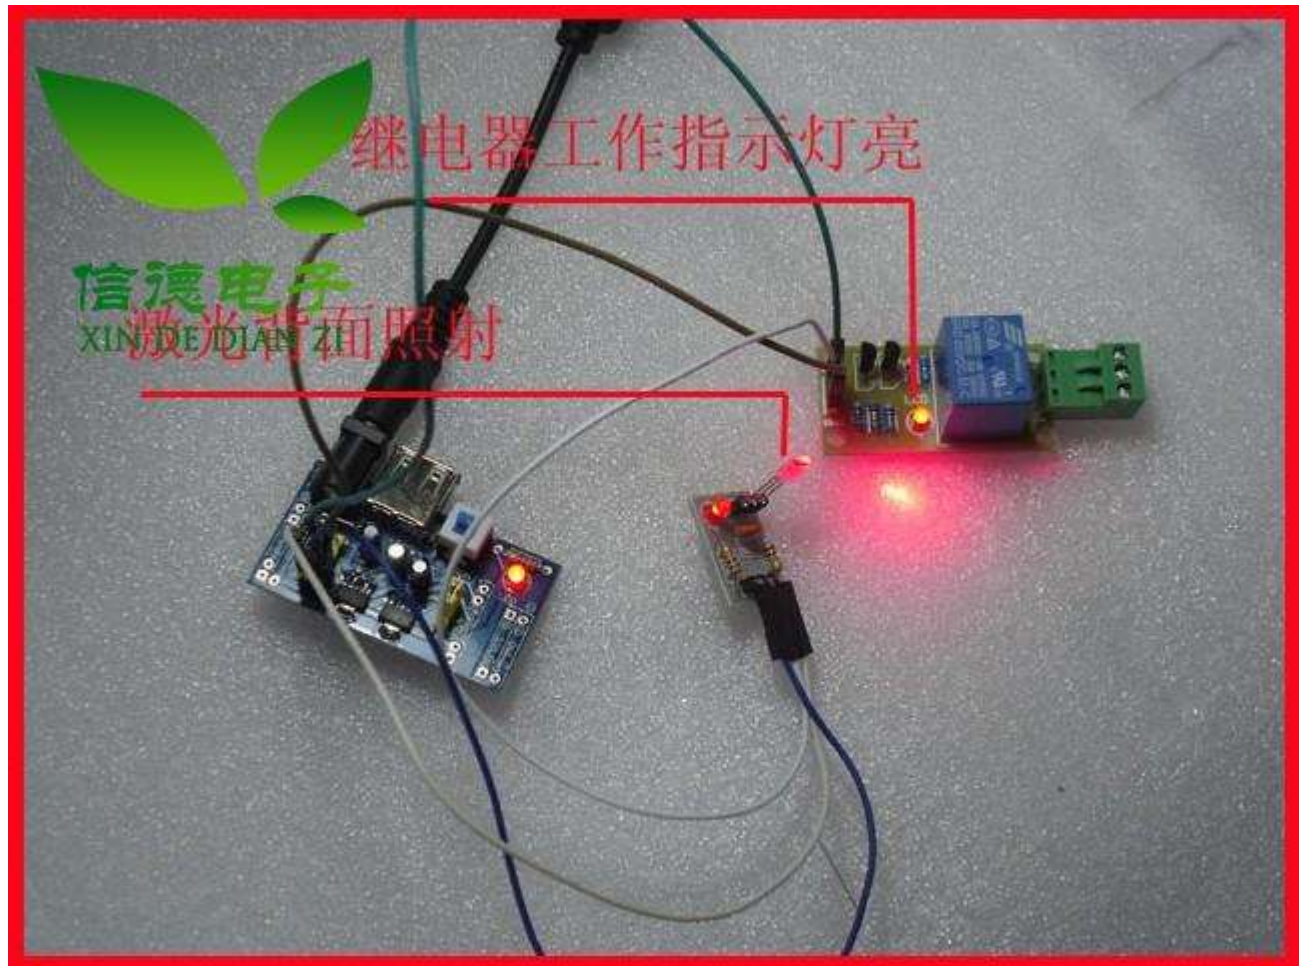

This sensor uses an unmodulated laser receiver, so please use it indoors, as outdoor sunlight will interfere.